




















Ref. No.		Size mm	Thickness mm	Gap mm	Standard Length mm	Weight kg/m
MILD STEEL EDGING SECTIONS						
Suitable for framing flattened expanded metal up to and including 1.58mm						
UF1		6.35 OD split tube	1.20	1.78	2490	0.13
UF2		6.35	0.55	1.78	1905	0.07
UF3*		12.70	0.90	1.78	2540	0.18
UF4*		19.05	1.20	1.78	3810	0.38
UF5		31.75	1.20	1.78	3810	0.62
Suitable for framing flattened Expanded metal up to and including 3.18mm						
UF6*		12.70	0.90	3.30	2540	0.20
UF7*		19.05	1.20	3.30	3810	0.38
UF8*		31.75	1.20	3.30	3810	0.62
Suitable for framing raised type expanded steel with strand widths of 2.39mm or under						
UF9*		19.05	1.20	5.08	3810	0.38
UF10*		31.75	1.20	5.08	3810	0.62
Suitable for framing raised type expanded steel with strand widths of 4.75mm or under						
UF11		19.05	1.50	10.16	3810	0.45
UF12		25.40	1.50	10.16	3810	0.63
UF13		25.40	2.95	10.16	3810	1.20
UF14		38.10	1.50	10.16	3810	0.91
UF15		38.10	2.95	10.16	3810	1.79
Suitable for framing raised type expanded steel with strand widths of 6.09mm or under. Can be used for framing expanded steel walkway grating ref. 2496. For full details see leaflet IP5						
UF16		14.29	1.50	12.70	3810	0.46
Suitable for framing 10g and 12g diameter welded mesh and expanded metal with strand widths up to 3.2mm						
UF18		19.05	1.20	6.50	3810	0.42
UF19		31.75	1.20	6.50	3810	0.66


*ALSO AVAILABLE IN STAINLESS STEEL. SEE BOTTOM OF PAGE FOR DETAILS

WE CAN SUPPLY, TO ORDER, SOME SIZES IN GALVANISED STEEL OR ALUMINIUM.

MILD STEEL 'L' EDGING SECTIONS

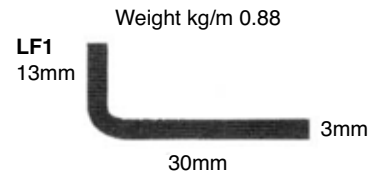

REF. LF1 section for framing 'angled strand' type expanded steel having strand widths of 4.75mm or under. Standard length 2500mm.

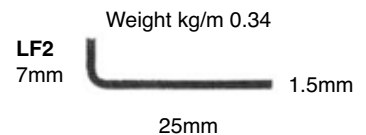

REF. LF2L section for framing 'angled strand' type expanded steel having strand widths of 2.40mm or under and also flattened expanded steel. Standard length 2500mm.

Steel L sections have been specially produced for framing expanded steel mesh and they offer several advantages.

With two sections only many expanded steel meshes can be framed easily and with cost saving.

There is less metal in the L sections than in U sections so they are more economical and are lighter.

With the L sections the fabrication of framed panels is easier and therefore less costly. The complete frame is welded together with mitred corners and the mesh placed in position and welded at intervals; all welding is inside the panel.

The need for sliding the mesh into a gap and clenching is eliminated.

The absence of a narrow gap enables protective finishes such as galvanising, paint or plastic coating to achieve total coverage.

The L sections can be used with advantage wherever the framed panel is to be bolted to a structure with the rear face of the framing concealed.

STAINLESS STEEL EDGING SECTIONS

REF. NO.
UFS 3, UFS 4, UFS 6, UFS 7, UFS 8, UFS 9, UFS 10

Dimensions as opposite

PROFILE EDGING SECTIONS



	Code	Size mm	Thickness mm	Gap mm	Standard Length mm	Weight kg/m
MILD STEEL RECTANGULAR FOR PERFORATED & SHEET METAL						
	1500P001	12 x 18	1.25	1.3	3000	0.545
	1500P002	12 x 18	1.25	1.8	3000	0.57
	1500P003	20 x 30	1.50	1.7	3000	1.27
	1500P004	20 x 30	1.50	2.7	3000	1.27
TRIANGULAR						
	1500P005	30 x 22	1.50	1.7	3000	1.15
TRAPEZIUM						
	1500P006	20 x 20	1.25	1.7	3000	0.67
ROUND						
	1500P007	Ø 10	1.00	1.3	3000	0.243
	1500P008	Ø 18	1.25	1.7	3000	0.57
	1500P009	Ø 27	1.50	1.7	3000	1.15
	1500P010	Ø 27	1.50	2.7	3000	1.15
STAINLESS STEEL ROUND						
	1500P011	Ø 18	1.25	1.7	3000	0.57
	1500P012	Ø 27	1.50	1.7	3000	1.15
SQUARE FOR WELDED OR WOVEN MESH						
	1500P013	30 x 30	1.50	3.0	3000	1.48
	1500P014	30 x 30	1.50	4.0	3000	1.47
	1500P015	30 x 30	1.50	5.0	3000	1.46

PLEASE NOTE THESE PROFILES CAN ALSO BE SUPPLIED IN GALVANISED STEEL, STAINLESS STEEL AND ALUMINIUM.

Southampton

Tel: 023 8070 3333
Fax: 023 8070 5555

Rainham

Tel: 01708 25 35 45
Fax: 01708 25 35 50

Ilkeston

Tel: 0115 930 2070
Fax: 0115 951 2455

Birmingham

Tel: 0121 565 8282
Fax: 0121 565 8292

Haydock

Tel: 01942 86 88 88
Fax: 01942 86 88 99

Edinburgh

Tel: 0131 335 5999
Fax: 0131 335 5911

Glasgow

Tel: 0141 332 3231
Fax: 0141 332 7325



F.H. BRUNDLE
SERVING THE TRADE SINCE 1889

www.fhbrundle.co.uk
sales@brundle.com